


18 mm Diameter Incremental Rotary Encoders

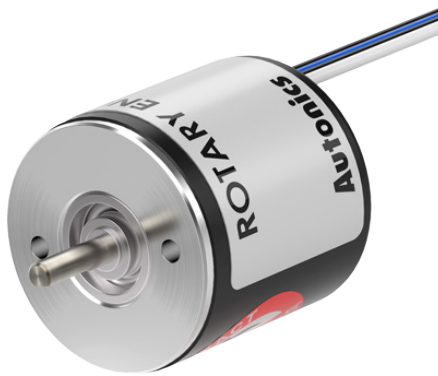

E18 Series PRODUCT MANUAL

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

Features

- Ultra-compact (Ø 18 mm) housing and ultra-lightweight (12 g) design
- Easy installation in tight or limited spaces
- Low shaft moment of inertia
- Various resolutions: 100, 200, 300, 400 pulses per revolution
- Power supply: 5 VDC \pm \pm 5%

Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.

⚠ Warning Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime / disaster prevention devices, etc.)**
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable / explosive / corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact or salinity may be present.**
Failure to follow this instruction may result in explosion or fire.
- 03. Install on a device panel to use.**
Failure to follow this instruction may result in fire.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**
Failure to follow this instruction may result in fire.
- 05. Check 'Connections' before wiring.**
Failure to follow this instruction may result in fire.
- 06. Do not disassemble or modify the unit.**
Failure to follow this instruction may result in fire.

⚠ Caution Failure to follow instructions may result in injury or product damage.

- 01. Use the unit within the rated specifications.**
Failure to follow this instruction may result in fire or product damage.
- 02. Do not short the load.**
Failure to follow this instruction may result in fire.
- 03. Do not use the unit near the place where there is the equipment which generates strong magnetic force or high frequency noise and strong alkaline, strong acidic exists.**
Failure to follow this instruction may result in product damage.

Cautions during Use

- Follow instructions in 'Cautions during Use'.
Otherwise, It may cause unexpected accidents.
- 5 VDC \equiv power supply should be insulated and limited voltage / current or Class 2, SELV power supply device.
- For using the unit with the equipment which generates noise (switching regulator, inverter, servo motor, etc.), ground the shield wire to the F.G. terminal.
- When supplying power with SMPS, ground the F.G. terminal and connect the noise canceling capacitor between the 0 V and F.G. terminals.
- Check the wire type and response frequency when extending wire because of distortion of waveform or residual voltage increment etc. by line resistance or capacity between lines.
- This unit may be used in the following environments.
 - Indoors (in the environment condition rated in 'Specifications')
 - Altitude max. 2,000 m
 - Pollution degree 2
 - Installation category II

Cautions during Installation

- Install the unit correctly with the usage environment, location, and the designated specifications.
- Do not load overweight on the shaft.
- Do not put strong impact when insert a coupling into shaft.
Failure to follow this instruction may result in product damage.
- When fixing the product or coupling with a wrench, tighten under 0.15 N.m.
- If the coupling error (parallel misalignment, angular misalignment) between the shaft increases while installation, the life cycle of the coupling and the encoder can be shorten.
- Do not apply tensile strength over 10 N to the cable.

Ordering Information

This is only for reference, the actual product does not support all combinations. For selecting the specified model, follow the Autonics website.

E18 ① ② - ③ - ④ - ⑤ - ⑥ - ⑦

① Shaft type

S: Shaft type

② Shaft outer diameter

2: Ø 2 mm
2.5: Ø 2.5 mm

③ Resolution

Number: Refer to resolution in "Specifications"

④ Output phase

1: A

⑤ Control output

N: NPN open collector output
V: Voltage output

⑥ Power supply

5: 5 VDC ± 5%

⑦ Connection

R: Axial cable type
S: Radial cable type

Product Components

Shaft Outer Diameter	Ø 2 mm	Ø 2.5 mm
Product Components	Product, Instruction manual	
Bolt	× 4	-
Coupling	× 1	-


Connections

- Unused wires must be insulated.
- The metal case and shield cable of encoders must be grounded (F.G.).


Color	Function
Black	OUT A
Brown	+V
Blue	GND

Inner Circuit

■ NPN open collector output




■ Voltage output



Output Waveform

- The rotation direction is based on facing the shaft, and it is clockwise (CW) when rotating to the right.



Specifications

Model	E18□-□-1-N-5-□	E18S□-□-1-V-5-□
Resolution	100 / 200 / 300 / 400 PPR model	
Control output	NPN open collector output	Voltage output
Output phase	A	
Inflow current	≤ 30 mA	-
Residual voltage	≤ 0.4 VDC≐	≤ 0.4 VDC≐
Outflow current	-	≤ 10 mA
Response speed ⁰¹⁾	≤ 1 μs	
Max. response freq.	25 kHz	
Max. allowable revolution ⁰²⁾	6,000 rpm	
Starting torque	≤ 9.8 × 10 ⁻⁴ N·m	
Inertia moment	≤ 0.5 g·cm ² (5 × 10 ⁻⁸ kg·m ²)	
Allowable shaft load	Radial: ≤ 200 gf, Thrust: ≤ 200 gf	
Unit weight (packaged)	Shaft outer diameter Ø 2 mm model: ≈ 12 g (≈ 35.4 g) Shaft outer diameter Ø 2.5 mm model: ≈ 12 g (≈ 34.2 g)	
Approval	CE, RoHS, REACH, EAC	CE, RoHS, REACH, EAC

01) Based on cable length: 1 m, I sink: 20 mA



02) Select resolution to satisfy Max. allowable revolution ≥ Max. response revolution

$$[\text{max. response revolution (rpm)} = \frac{\text{max. response frequency}}{\text{resolution}} \times 60 \text{ sec}]$$

Power supply	5 VDC ± 5% (ripple P-P: ≤ 5%)
Current consumption	≤ 50 mA (no load)
Insulation resistance	≥ 100 MΩ (500 VDC≐ megger)
Dielectric strength	Between the charging part and the case: 500 VAC ~ 50 / 60 Hz for 1 min.
Vibration	1 mm double amplitude at frequency 10 to 55 Hz in each X, Y, Z direction for 2 hours
Shock	≤ 50 G
Ambient temperature	-10 to 70 °C, storage: -20 to 80 °C (no freezing or condensation)
Ambient humidity	35 to 85%RH, storage: 35 to 90%RH (no freezing or condensation)
Protection rating	IP50 (IEC standard)
Connection	Axial / Radial cable type model
Cable spec.	Ø 1.28 mm, 3-wire, 150 mm, flat ribbon cable
Wire spec.	AWG26 (0.16 mm, 7-core), insulator diameter: Ø 1.28 mm


Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.

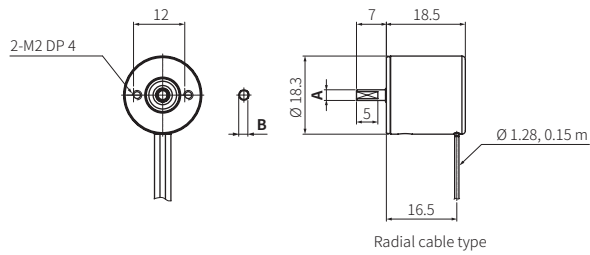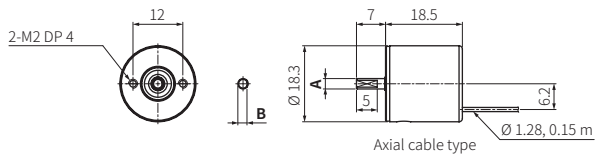

	A	B
E18S2	Ø 2.0 ^{-0.004} _{-0.02}	1.7
E18S2.5	Ø 2.5 ^{-0.004} _{-0.02}	2.2

■ Coupling



- Parallel misalignment: ≤ 0.15 mm
- Angular misalignment: ≤ 2°
- End-play: ≤ 0.2 mm

ООО "РусАвтоматизация"

454010 г. Челябинск, ул. Гагарина 5, оф. 507
 тел. 8-800-775-09-57 (звонок бесплатный), +7(351)799-54-26, тел./факс +7(351)211-64-57
info@rusautomation.ru; rusавтоматизация.рф; www.rusautomation.ru