




www.fine-tek.com

Magnetostrictive Level Transmitter



RusAutomation

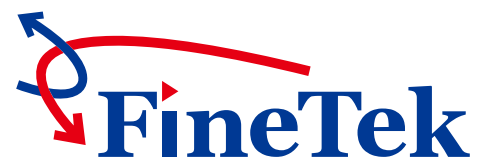

Innovation · Quality · Sharing

INTRODUCTION

The FineTek magnetostrictive level transmitter identifies the level of liquids and solutions with high precision and reliability.

This versatile sensor is ideal for continuous level measurement of a wide range of liquids. Application ranges from petrochemical industries, marine and shipping to food and beverage production.

The sensor has a loop power supply and provides direct analog or digital output to the user interface.


The FineTek magnetostrictive level sensor has proven itself due to its durability in a wide range of temperatures, pressures and operating conditions as well as its low maintenance nature.

FEATURES

- Absolute positioning output and no calibration required after power failure.
- Stability and reliability.
- Ease installation without calibration & maintenance.
- Prompt response time, high resolution & high accuracy.
- Durable structure, dust-proof, withstands high pressure.
- Oil/water dual level indication.
- The Max. operation temp. is 200°C.
- EG31, 32, 36, 37 adopted loop power structure for wire saving.
- Explosion-proof model available for hazardous environments.
- Housing of EG3 is IP67(Enclosure)/IP69K(Probe).
- Support HART / RS485 and 4~20mA / voltage output.

APPLICATION

- Liquefied natural gas.
- Crude oil, petroleum's and diesels.
- Chemical processing.
- Pharmaceuticals and medication.
- Food and beverages, breweries.
- Dams, water barriers, wastewater treatment.
- Power plants, marine and shipbuilding.
- Tooling or alignment position for processing machines.

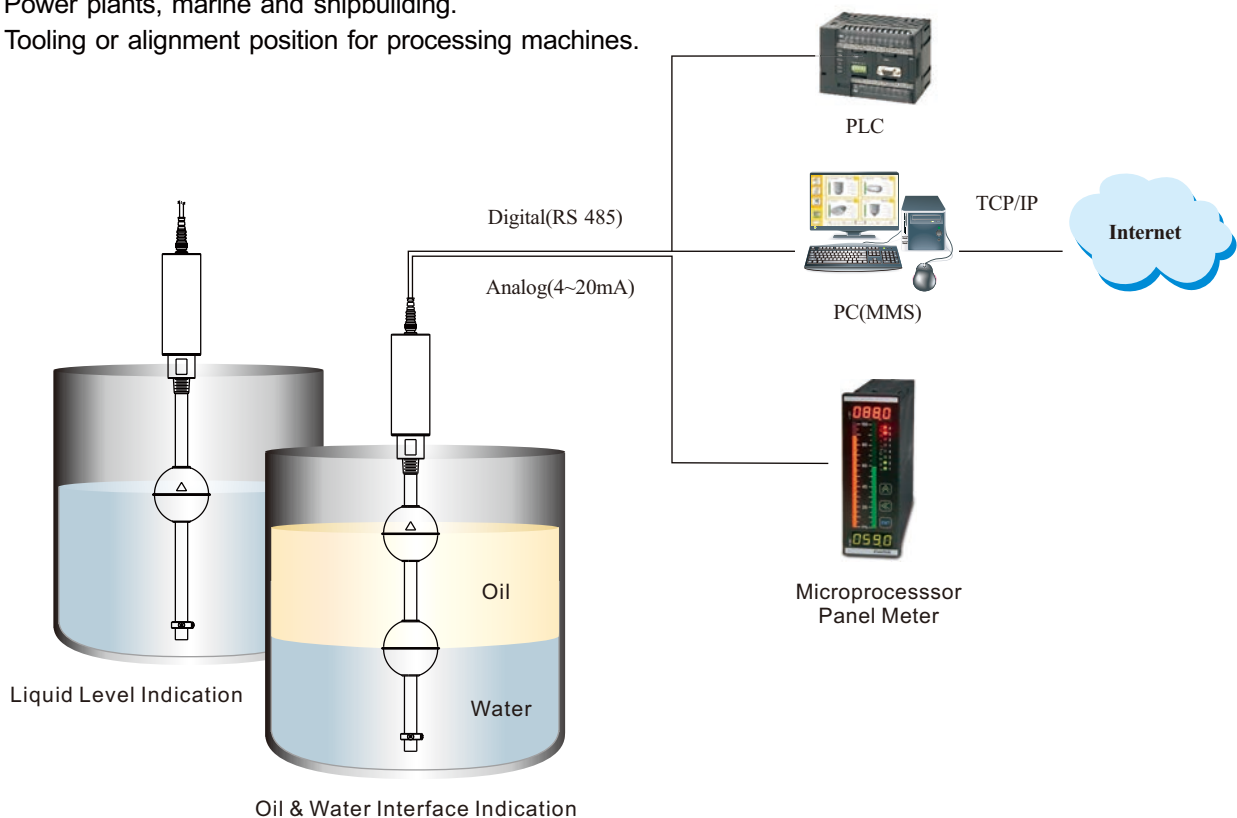

OPERATING PRINCIPLE

The sensor mainly consists of magnetorestrictive wires sealed in a stem/rod and a permanent magnet sealed into a float that can move up and down the stem. Electrical current travels along the wires in the stem creating an axial magnetic field. When the float's and stem's magnetic field intersect, a torsional force is created with different height levels (see right).



The sensor measures the liquid level (D) by calculating the elapsed time between torsional forces. Using velocity and time, distance can be calculated. This action is timely and continuous. A change in float position will be detected promptly via signal output.

CONVERSION FORMULA

The relation of D & 4~20mA output

$$\frac{IX - 4}{20 - 4} \text{mA} = \frac{DT - TX}{\Delta T} = \frac{DX}{\Delta D}$$



$$\Rightarrow IX = \frac{16DX}{\Delta D} + 4 \text{mA} \text{ (The relative current)}$$

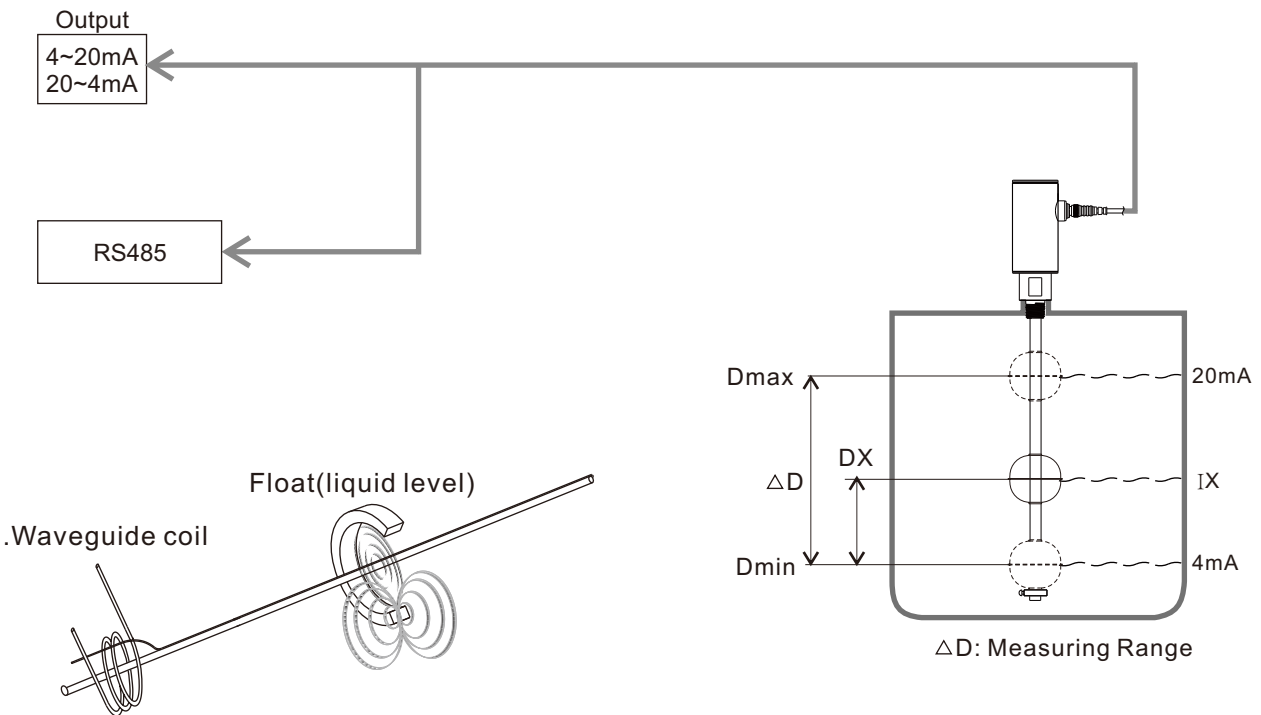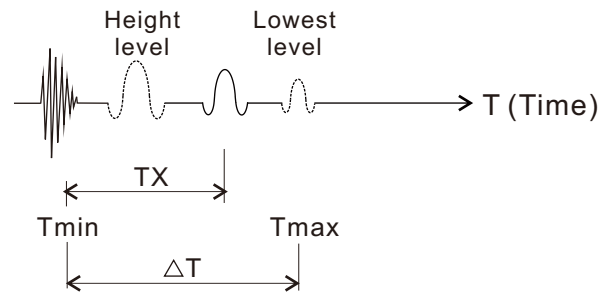



STANDARD MODEL (2 Wire)

<p>Dimensions (Unit: mm)</p>		
<p>Model No.</p>	<p>EG31 (Standard Model)</p>	<p>EG31 (High Temperature Model)</p>
<p>Application</p>	<p>Two-wire loop power output, for Oil/Water interface, pharmaceutical and food grade level control.</p>	<p>Two-wire loop power output, high process environment application.</p>
<p>Measuring range</p>	<p>50~5500mm</p>	<p>50~5500mm</p>
<p>Non-Linearity</p>	<p>± 0.05% F.S. or ± 1.0mm (whichever is greater)</p>	<p>± 0.05% F.S. or ± 1.0mm (whichever is greater)</p>
<p>Repeatability</p>	<p>± 0.004% F.S.</p>	<p>± 0.004% F.S.</p>
<p>Temp. coefficient</p>	<p>± 100 ppm/°C</p>	<p>± 150 ppm/°C</p>
<p>Operation pressure</p>	<p>30 BAR(Max.)</p>	<p>30 BAR(Max.)</p>
<p>Ambient temp.</p>	<p>-40°C ~ 85°C</p>	<p>-40°C ~ 85°C</p>
<p>Operation temp.</p>	<p>-40°C ~ 125°C</p>	<p>-40°C ~ 200°C</p>
<p>Temp. accuracy</p>	<p>± 1°C</p>	<p>± 1°C</p>
<p>Output</p>	<p>4~20mA / 2 Wire</p>	<p>4~20mA / 2 Wire</p>
<p>Maximum load (Ω)</p>	<p>$(VS-18) \div 0.02$ VS=Supply voltage</p>	<p>$(VS-18) \div 0.02$ VS=Supply voltage</p>
<p>Digital output</p>	<p>RS485 / HART 7.3(option)</p>	<p>RS485 / HART 7.3(option)</p>
<p>Power supply</p>	<p>18~30V</p>	<p>18~30V</p>
<p>Housing material</p>	<p>SUS304 (SUS316 option)</p>	<p>SUS304 (SUS316 option)</p>
<p>Connection</p>	<p>1/2"PT</p>	<p>1/2"PT</p>
<p>Wetted material</p>	<p>SUS304</p>	<p>SUS304</p>
<p>Enclosure</p>	<p>IP67 (enclosure)/IP69K(probe)</p>	<p>IP67 (enclosure)/IP69K(probe)</p>

HIGH ACCURACY MODEL (2 Wire/4 Wire)

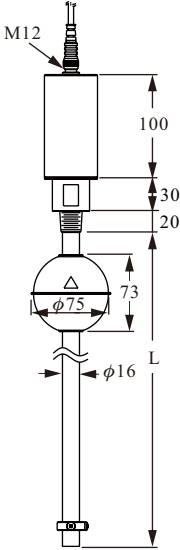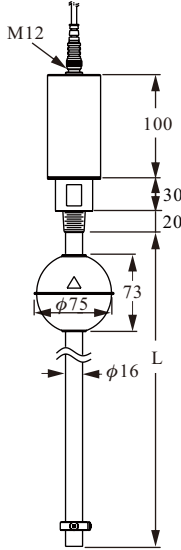Dimensions (Unit: mm)		
Model No.	EG32 (High Accuracy Model)	EG34 (High Accuracy Model)
Application	Two-wire loop power output, comply with high accuracy & HART demands.	Four wire output,high speed active in low voltage 5V.
Measuring range	50~5500mm	50~5500mm
Non-Linearity	50~500mm@± 100μm 501~2500mm@± 0.02%F.S. 2501~5500mm@± 0.04%F.S.	50~500mm@± 100μm 501~2500mm@± 0.02%F.S. 2501~5500mm@± 0.04%F.S.
Repeatability	± 0.002% F.S.	± 0.002% F.S.
Temp. coefficient	± 100 ppm/°C	± 100 ppm/°C
Operation pressure	30 BAR(Max.)	30 BAR(Max.)
Ambient temp.	-40°C ~ 85°C	-40°C ~ 85°C
Operation temp.	-40°C ~ 125°C	-40°C ~ 125°C
Temp. accuracy	± 1°C	± 1°C
Output	4~20mA / 2 Wire	0~10V,10~0V,± 10V,0~5V,5~0V,± 5V 4~20mA,20~4mA,0~20mA,20~0mA
Maximum load (Ω)	$(VS-18) \div 0.02$ VS=Supply voltage	$(VS-5) \div 0.02$ VS=Supply voltage
Digital output	RS485,HART 7.3 (option)	RS485
Power supply	18~30V	5~30V
Housing material	SUS304 (SUS316 option)	SUS304 (SUS316 option)
Connection	1/2"PT	1/2"PT
Wetted material	SUS304	SUS304
Enclosure	IP67 (enclosure)/IP69K(probe)	IP67 (enclosure)/IP69K(probe)



EXPLOSION PROOF MODEL (2 Wire)
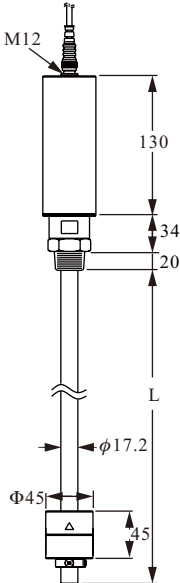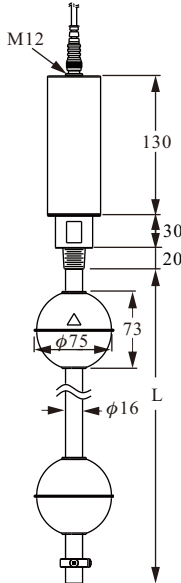
<p>Dimensions (Unit: mm)</p>	 <p>NEPSI PROOF No.GYB15.1889X Ex ia IIB T3~T6 PTB PROOF NO.13 ATEX 2016X II 1G Ex ia IIB T3~T6</p>	 <p>NEPSI PROOF No.GYB15.1889X Ex ia IIB T3~T6 PTB PROOF NO.13 ATEX 2016X II 1G Ex ia IIB T3~T6</p>
<p>Model No.</p>	<p>EG374 (Anti-Corrosion Model)</p>	<p>EG371 (Single/dual Float Model)</p>
<p>Application</p>	<p>Two-wire loop power output, for acid/alkali corrosion liquids.</p>	<p>Two-wire loop power output, for single/dual level and interface measurement.</p>
<p>Measuring range</p>	<p>50~2000mm</p>	<p>50~5500mm</p>
<p>Non-Linearity</p>	<p>±0.05% F.S. or ±1.0mm (whichever is greater)</p>	<p>±0.05% F.S. or ±1.0mm (whichever is greater)</p>
<p>Repeatability</p>	<p>±0.004% F.S.</p>	<p>±0.004% F.S.</p>
<p>Temp. coefficient</p>	<p>±100 ppm/°C</p>	<p>±100 ppm/°C</p>
<p>Operation pressure</p>	<p>5 BAR(Max.)</p>	<p>30 BAR(Max.)</p>
<p>Ambient temp.</p>	<p>-40°C ~ 85°C</p>	<p>-40°C ~ 85°C</p>
<p>Operation temp.</p>	<p>-20°C ~ 80°C</p>	<p>-40°C ~ 125°C</p>
<p>Temp. accuracy</p>	<p>±1°C</p>	<p>±1°C</p>
<p>Output</p>	<p>4~20mA/ 2 Wire</p>	<p>4~20mA/ 2 Wire</p>
<p>Max load (Ω)</p>	<p>$(VS-18) \div 0.02$ VS=Supply voltage</p>	<p>$(VS-18) \div 0.02$ VS=Supply voltage</p>
<p>Digital output</p>	<p>RS485 / HART 7.3(option)</p>	<p>RS485 / HART 7.3(option)</p>
<p>Power supply</p>	<p>12~30V(4-wire), 18~30V(2-wire), 18~28V(Exp Lotion proof)</p>	<p>12~30V(4-wire), 16~30V(2-wire), 16~28V(Exp Lotion proof)</p>
<p>Housing material</p>	<p>SUS304 (SUS316 option)</p>	<p>SUS304 (SUS316 option)</p>
<p>Connection</p>	<p>3/4"PT</p>	<p>1/2"PT</p>
<p>Wetted material</p>	<p>PP</p>	<p>SUS304</p>
<p>Enclosure</p>	<p>IP67 (enclosure) / IP69K(probe)</p>	<p>IP67 (enclosure) / IP69K(probe)</p>

※ Comply with safety barrier of Ex ia rating is essential for using in hazardous areas.(Refer to P.18)

EXPLOSION PROOF MODEL (2 Wire)

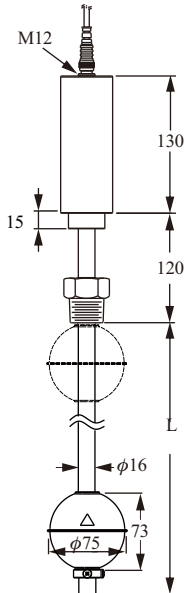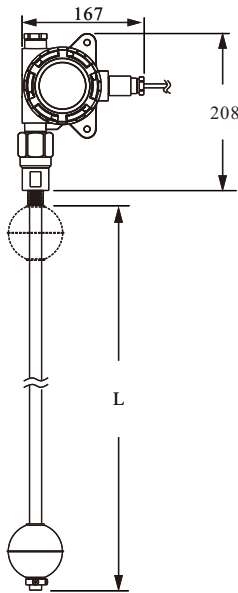

<p>Dimensions (Unit: mm)</p>	 <p>NEPSI PROOF No.GYB15.1889X Ex ia IIB T2~T6 PTB PROOF13 ATEX 2016X Ⓢ II 1G Ex ia IIB T3~T6</p>	 <p>NEPSI PROOF No.GYB14.1530X Ex ia IIB T3~T6Ga PTB PROOF16 ATEX 2002X Ⓢ II 1G Ex ia IIB T3~T6</p>
<p>Model No.</p>	<p>EG37A (Ex-proof High Temp. Model)</p>	<p>EG36 (Diaplay Model)</p>
<p>Application</p>	<p>Two-wire loop power output, explosion-proof model for hazadous environment.</p>	<p>Two-wire loop power output, explosion-proof model with diaplay for hazadous environment.</p>
<p>Measuring range</p>	<p>50~5500mm</p>	<p>50~5500mm</p>
<p>Non-Linearity</p>	<p>±0.05% F.S. or ±1.0mm (whichever is greater)</p>	<p>50mm~4000mm ±1mm 4000mm~5500mm ±0.025% F.S.</p>
<p>Repeatability</p>	<p>±0.004% F.S.</p>	<p>±0.004% F.S.</p>
<p>Temp. coefficient</p>	<p>±150 ppm/°C</p>	<p>±100 ppm/°C</p>
<p>Operation pressure</p>	<p>30 BAR(Max.)</p>	<p>30 BAR(Max.)</p>
<p>Ambient temp.</p>	<p>-40°C ~ 85°C</p>	<p>-40°C ~ 85°C</p>
<p>Operation temp.</p>	<p>-40°C ~ 195°C</p>	<p>-40°C ~ 125°C</p>
<p>Temp. accuracy</p>	<p>±1°C</p>	<p>±1°C</p>
<p>Output</p>	<p>4~20mA / 2 Wire</p>	<p>4~20mA / 2 Wire</p>
<p>Max load (Ω)</p>	<p>$(VS-18) \div 0.02$ VS=Supply voltage</p>	<p>$(VS-16) \div 0.02$ VS=Supply voltage</p>
<p>Digital output</p>	<p>RS485/HART 7.3(option)</p>	<p>RS485/HART 7.3(option)</p>
<p>Power supply</p>	<p>12~30V(4-wire), 18~30V(2-wire), 18~28V(Exp Losion proof)</p>	<p>12~30V(4-wire), 16~30V(2-wire), 16~28V(Exp Losion proof)</p>
<p>Housing material</p>	<p>SUS304 (SUS316 option)</p>	<p>Aluminum</p>
<p>Connection</p>	<p>1/2"PT</p>	<p>1/2"PT</p>
<p>Wetted material</p>	<p>SUS304</p>	<p>SUS304</p>
<p>Enclosure</p>	<p>IP67 (enclosure) / IP69K(probe)</p>	<p>IP67 (enclosure) / IP69K(probe)</p>

※ Comply with safety barrier of Ex ia rating is essential for using in hazardous areas.(Refer to P.18)




HOUSING OPTIONS

Mapping table of enclosure

EG31&EG37 explosion-proof (2 wire)	1 Top conduit	2 Side conduit
EG32&EG34 high accuracy series	1 Top conduit	2 Side conduit

※ Standard model cable length is 2m.

FLOAT SPECIFICATIONS

Model	Model Number	Dimensions ($\phi A \times B \times \phi C$ mm)	S.G.	Max. Pressure (kg/cm ²)	Material	Stem Size
	S5	75x73x20.5	E>0.7	30	SUS 304 / 316	$\phi 16$
	S4	52x52x15	E>0.75	30	SUS 316	$\phi 12.7$
	SD	52x52x15	E>0.9	30	SUS 316	$\phi 12.7$
	SE	75x73x20.5	E>0.9	20	SUS 304 / 316	$\phi 16$
	S3	45x55x15	E>0.7	12	SUS 316	$\phi 12.7$
	SC	45x55x15	E>0.9	12	SUS 316	$\phi 12.7$
	F3	45x45x20	E>0.65	5	PP in Grey	$\phi 18$ (coating)
	FC	45x45x20	E>0.9	5	PP in Grey	$\phi 18$ (coating)
	P3	48x45x18.5	E>0.6	5	PP in Black	$\phi 17.2$ (coating)
	PC	48x45x18.5	E>0.9	5	PP in Black	$\phi 17.2$ (coating)
	NB	48x46x15.6	E>0.5	30	NBR in Black	$\phi 12.7$
	ND	48x45x15.6	E>0.9	30	NBR in Black	$\phi 12.7$
	NC	48x46x20	E>0.5	30	NBR in Black	$\phi 16$
	NE	48x46x20	E>0.9	30	NBR in Black	$\phi 16$

※ S.G(E):specific gravity


WIRING

When RS485(ModBus)is applied,Loop power only as power.


EG31/EG32/EG37:

1. Single / Double float +RS485


Loop Power 24Vdc ± 10%

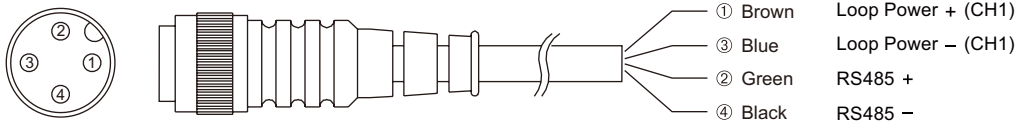

2. Single / Double float +HART

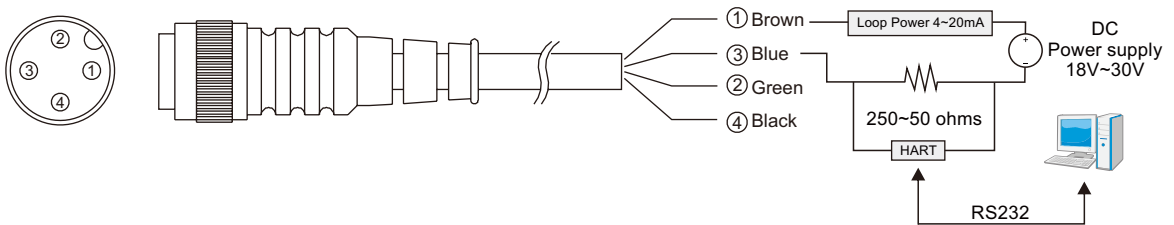


EG34:

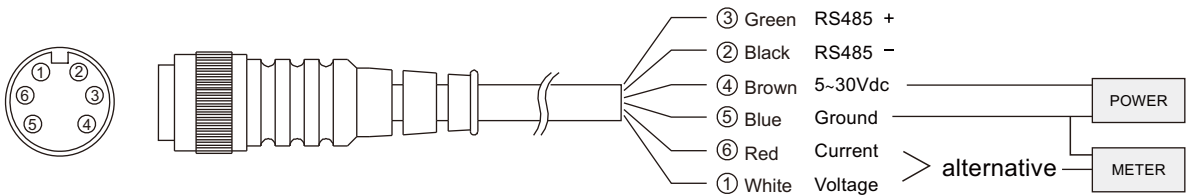

※The voltage or current is only alternative.

EG36:

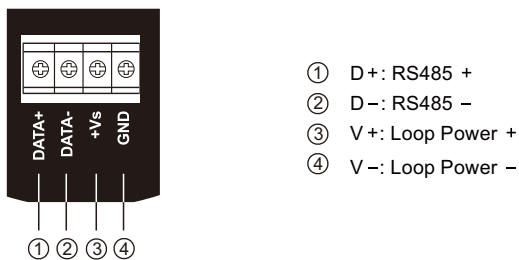

CUSTOMIZED STEM LENGTHS ARE AVAILABLE

Note the difference between ordered length and actual measurable stem length below.


(2M below) = Actual measurable length (X) = Ordered length (L) - 52mm - 15mm, adopted stem $\phi 12.7$

(2M above) = Actual measurable length (X) = Ordered length (L) - 73mm - 15mm, adopted stem $\phi 16$


(2M below) = Ordered length (L) = Actual measurable length (X) + 52mm - 15mm, adopted stem $\phi 12.7$

(2M above) = Ordered length (L) = Actual measurable length (X) + 73mm - 15mm, adopted stem $\phi 16$


Below 2M, stem $\phi 12.7$

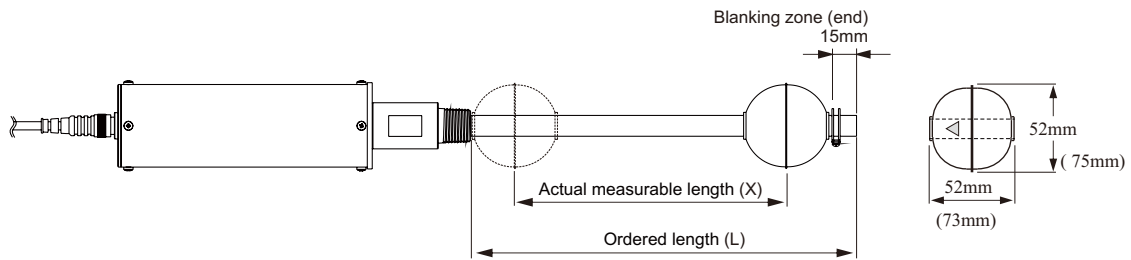

Above 2M, stem $\phi 16$

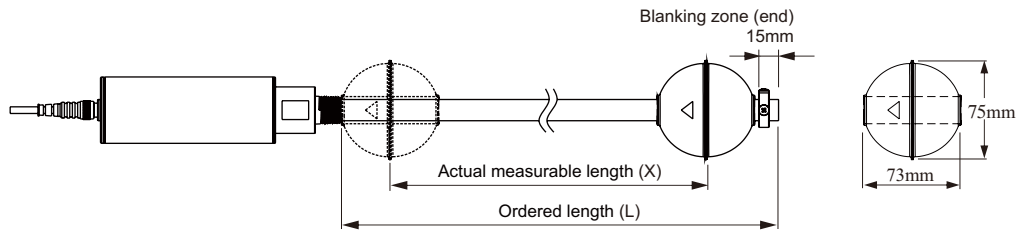

Below 2M, stem $\phi 12.7$, with PP coating to $\phi 17.2$

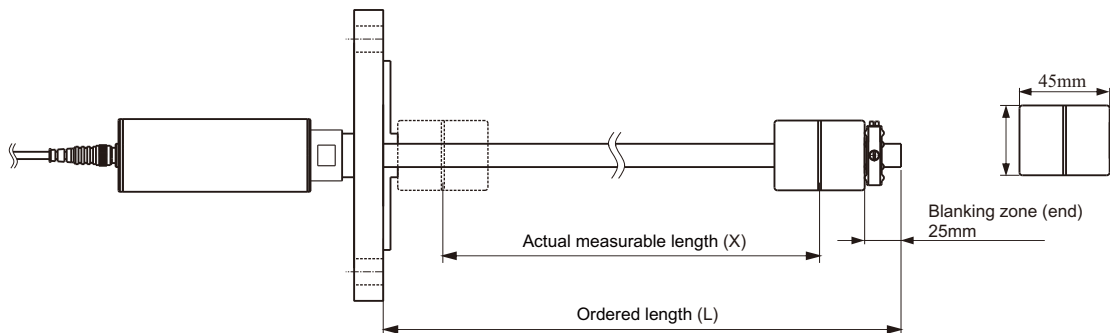


INSTALLATION


1. Loop power 24Vdc \pm 10%
2. The product is calibrated before shipment and should be sufficient to meet user needs.
3. Do not bend the stem, put pressure on it or force it in any manner.
4. For best results, use the included float only.
5. When the mounting hole is large enough, guide the stem and float through the hole to install.
6. If the hole is NOT large enough, remove float, install the stem and assemble float from inside the container.
7. When assembling the float onto the stem, the float's direction mark should face the housing.
8. Ensure the float stopper is fixed firmly.
9. If the stem is bent and can not work, it needs to be returned to the factory for calibration.
11. Bubble wrap/foam packaging is necessary to ensure safety during transportation.
12. Unnecessary opening of housing may affect accuracy.

Removing the float


Step 1:
Loosen the stopper at stem end

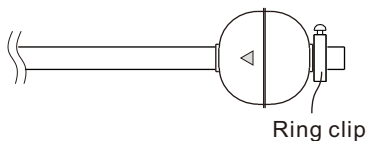


Step 2:
Take off the float




Step 3:
Install the sensor onto the tank,
and tighten the connection

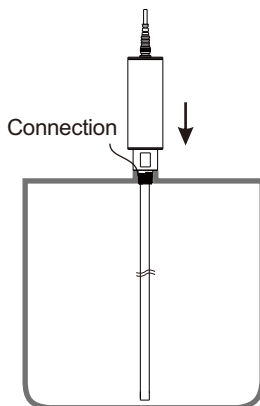

Step 4:
Assemble the float onto the stem
and tighten the connection the
housing. Note the direction of float

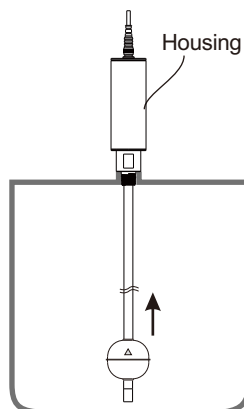

Step 5:
Firmly fasten the stopper

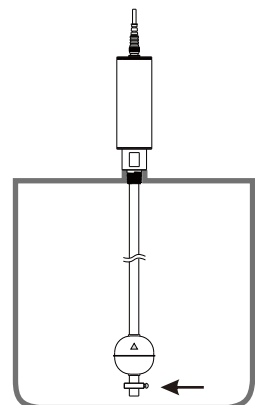

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
EG31 Standard Type	EGX10000-A1
EG31 High Temperature Type	EGX10200-A1
EG32/34 High Accuracy Type	EGX20000-A1
EG32/34 High Accuracy & Temperature Type	EGX20200-A1
EG374 Anti-Corrosion Type	EGX1001B-B1
EG371 Ex- Proof Type	EGX1001B-A1
EG37A Ex- Proof High Temperature Type	EGX1021B-A1
EG36 Display Type	EGX3001B-A1
EG36 High Temperature DisplayType	EGX3021B-A1

ORDER INFORMATION

EGX ⁰⁴ ⁰⁵ ⁰⁶ ⁰⁷ ⁰⁸ - ⁰⁹ ¹⁰ ¹¹ ¹² ¹³ ¹⁴ ¹⁵ ¹⁶ ¹⁷ ¹⁸ ¹⁹ ²⁰ ²¹ ²² ²³ ²⁴ ²⁵ ²⁶ ²⁷ ²⁸ ²⁹ ³⁰ ³¹ ³² ³³

④ Version
 1: 132mm (EG31/EG37)
 2: 97mm (EG32/EG34)
 3: Display type (EG36)

⑤ ⑥ Model
 00: Standard
 02: Hi-temperation

⑦ ⑧ Certification
 00: None
 1B: ATEX-Exia
 7B: NEPSI-Exia

⑨ ⑩ Sensor Type
 A1: Probe type
 B1: Anti-Corrosion probe type

Connection

⑪ ⑫	⑬ ⑭	⑮ ⑯
Flange item	A5: 1/2"	01: PT male
AI : 3A	A7: 3/4"	03: PF male
AK: JIS-FF	A8: 1"	07: NPT male
AN: ANSI-RF	B1: 1-1/2"	40: 5 kg/cm ²
AS: DIN-FF	B2: 2"	42: 10 kg/cm ²
	B4: 2-1/2"	48: 150 Lbs
Thread item	D7: DN20	49: 300 Lbs
AC: ANSI	D8: DN25	57: PN10
AA: JIS	D9: DN32	58: PN16
	E1: DN40	
	E2: DN50	
	E3: DN65	

(Next page)

EGX ⁰⁴ ⁰⁵ ⁰⁶ ⁰⁷ ⁰⁸ - ⁰⁹ ¹⁰ ¹¹ ¹² ¹³ ¹⁴ ¹⁵ ¹⁶ ¹⁷ ¹⁸ ¹⁹ ²⁰ ²¹ ²² ²³ ²⁴ ²⁵ ²⁶ ²⁷ ²⁸ ²⁹ ³⁰ ³¹ ³² ³³

¹⁷ ¹⁸ **Probe diameter**

- 1G: ϕ 9.5mm
- 2A: ϕ 12.7mm
- 2C: ϕ 16.0mm
- 2D: ϕ 17.2mm

¹⁹ ²⁰ **Probe material**

- MA: SUS 304
- MB: SUS 316
- MC: SUS 316L
- 18: PP

²¹ ²² **Float 1**

- | | |
|-------------------------|--------------------------|
| 00: None | P3: 48*45*18.5(S.G>0.6) |
| S3: 45*55*15(S.G>0.65) | PC: 48*45*18.5(S.G>0.9) |
| SC: 45*55*15(S.G>0.9) | NC: 48*46*20(S.G>0.5) |
| S4: 52*52*15(S.G>0.55) | NE: 48*46*20(S.G>0.9) |
| SD: 52*52*15(S.G>0.9) | S5: 75*73*20(S.G>0.65) |
| NB: 48*46*15.6(S.G>0.5) | SE: 75*73*20.5(S.G>0.9) |
| ND: 48*46*15.6(S.G>0.9) | NC: 48*46*20(S.G>0.5) |
| F3: 45*45*20(S.G>0.65) | A1: 32*69*10.9(S.G>0.75) |
| FC: 45*45*20(S.G>0.9) | AA: 32*69*10.9(S.G>0.9) |

²³ ²⁴ **Float 2**

- 00: None
- SC: 45*55*15(E>0.9)
- SD: 52*52*15(E>0.9)
- ND: 48*46*15.6(E>0.9)
- FC: 45*45*20(E>0.9)
- PC: 48*45*18.5(E>0.9)
- NE: 48*46*20(E>0.9)
- SE: 75*73*20.5(E>0.9)
- AA: 32*69*10.9(E>0.9)

(Next page)

TX10 ISOLATED SAFETY BARRIER


OPERATING PRINCIPLE

Isolated safety barrier provides power supply to transmitters located in hazardous zone and transmit isolated supply current signal to safe zone. Max. input 0~20mA which can be transformed to different analog outputs, such as 0~20mA / 4~20mA / 0~5V / 0~10V.

FEATURES


- 1 current input port to connect with continuous current or current output products. Applicable for use in hazardous zone.
- 3 output ports - relay output, current output, and RS-485.
- LED indicator, user friendly.
- DIP switch for function selection.
- In house programming per customers' criteria.
- Self-test function for system function monitoring.
- Setting relay output as alarm for optional external sensing unit connection.
- Optional RS-485 interface enables easy system configuration & supply current data retrieve.
- Product design complies with explosion proof standard.
- 2 dual-color LEDs
 - ▶ PWR LED: Green - Normal
Red - Abnormal
 - ▶ OUT/CHK LED: Yellow - Relay activated
Red (Flash) - Input current abnormal

SCHEMATIC DIAGRAM

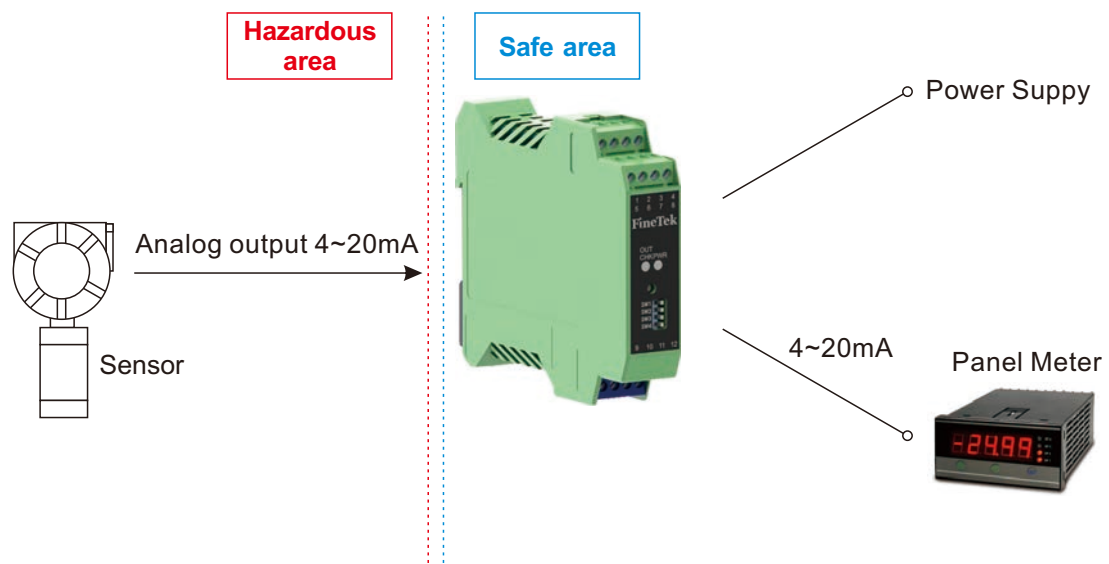


WIRING



TX100R

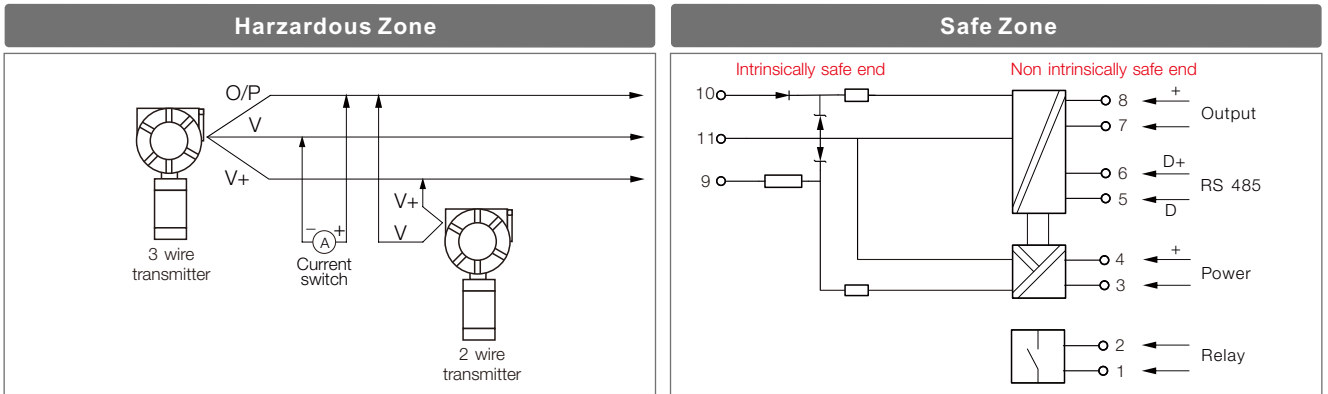

TX101F

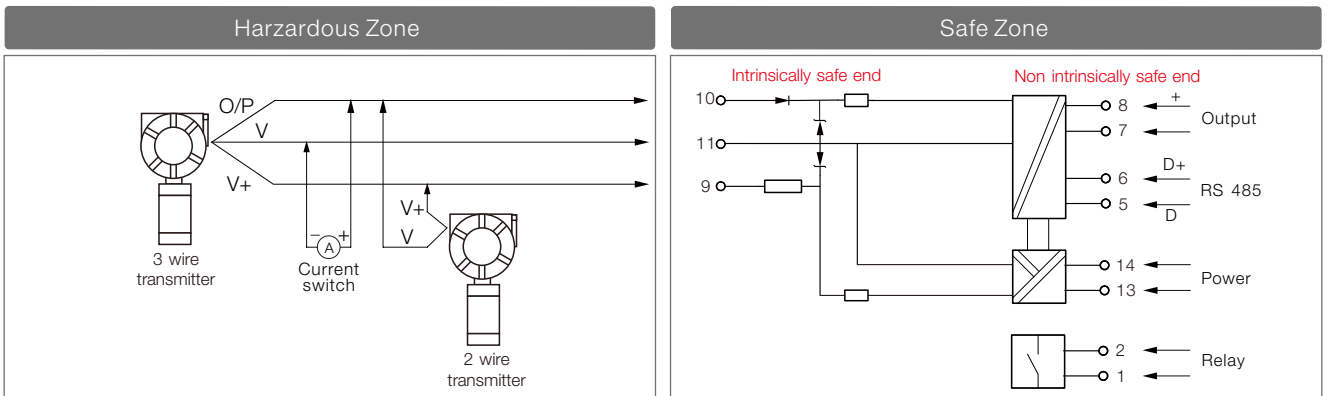

SPECIFICATION
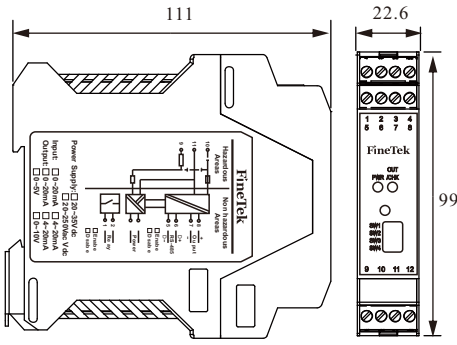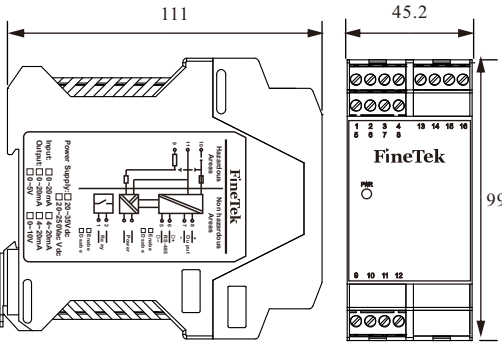
<p>Dimensions (Unit: mm)</p>		
Model No.	TX100R	TX101F
Supply voltage	20~35 Vdc	20~250 Vdc/Vac, 50/60 Hz
Power supply protection	Power supply reverse protection	Non-directionality input
Current consumption	< 100 mA @24 V, Load 20mA	< 200 mA @24 V, Load 20mA
Hazardous Zone		
Input	0~20/4~20	
Open loop supply voltage	< 28 Vdc	
Distribution supply voltage	> 15 Vdc (Load 20 mA)	
Safe Zone		
Output	Current: 0~20/4~20 mA Load resistance: <550 ohm or Voltage: 0~5/0~10V Load resistance: <20k ohm	
Response time	< 5 ms	
Accuracy	0.1 % F.S., 0.5% @ <0.3V (20°C)	
Temp. coefficient	< 100 ppm/°C	
Isolation	2500Vac : Current leakage < 1mA : 1min. 1. Intrinsic end & Non-Intrinsic end 2. Non-Intrinsic end power supply & output	
Ambient temp.	-20~60 °C	
Applicable zone	Zone 0, Zone 1, Zone 2, IIA, IIB, IIC T4~T6	
External equipments	2-Wire transmitter 3-Wire transmitter Current output transmitter	

MODEL NUMBER / ORDER CODE COMPARISON TABLE

ORDER INFORMATION

Model Number	Order Code
TX100R	TXX1017BB
TX101F	TXX1007BC

TXX 1 ⁰⁵ ⁰⁶ 7 B - ⁰⁹ A ¹¹ ¹² ¹³

⑤ ⑥ Model

- 00: Standard(W45.2×H113.6×D99)
- 01: Economic(W22.6×H113.6×D99)

⑨ Power supply

- B: 20~35 Vdc
- C: 20~250 Vdc/Vac

⑪ Output 1

- A: 4~20 mA
- B: 0~20 mA
- C: 0~5 V
- D: 0~10 V


⑫ Output 2

- 0: None
- A: RS485

⑬ Output 3

- 0: None
- C: Relay

Global Network

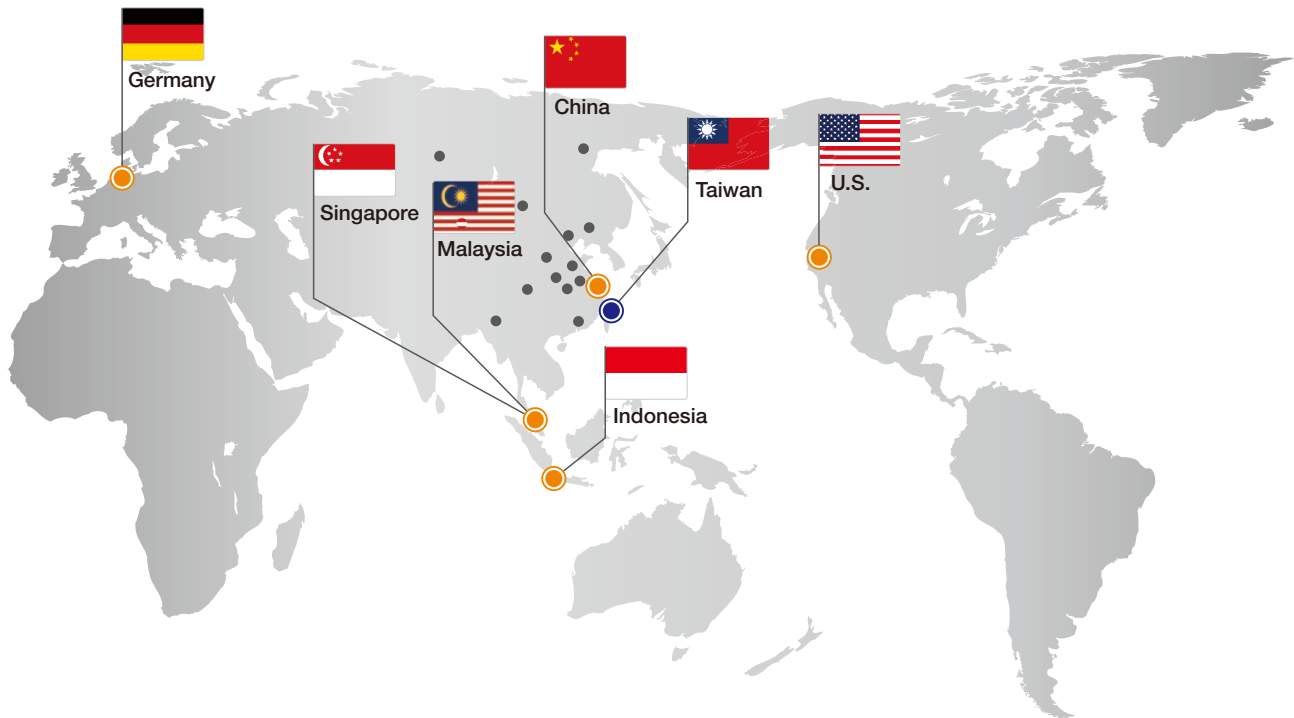

■ Asia

● Taiwan

FineTek Co., Ltd. - Taipei Head Quarter
No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886 2 2269 6789
FAX: 886 2 2268 6682
EMAIL: info@fine tek.com

● China

Fine automation Co., Ltd. - Shanghai Factory
No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86 21 6490 7260
EMAIL: info.sh@fine tek.com

● Singapore

FineTek Pte Ltd. - Singapore Office
No. 60 Kaki Bukit Place, #07 06 Eunos
Techpark 2 Lobby B, Singapore 415979
TEL: 65 6452 6340
EMAIL: info.sg@fine tek.com

● Indonesia

FineTek Co., Ltd. - Indonesia Office
Ruko Golden 8 Blok H No.38
Gading Serpong, Tangerang, Indonesia
TEL: 62 (021) 2923 1688
EMAIL: info.id@fine tek.com

● Malaysia

FineTek Co., Ltd. - Malaysia Office
8 05, Plaza Azalea, Persiaran Bandaraya,
Seksyen 14, 40000 Shah Alam, Selangor, Malaysiac
TEL: 603 5524 7168
EMAIL: info.my@fine tek.com

■ North America

● California, U.S.

Aplus Finetek Sensor Inc. - US Office
355 S. Lemon Ave, Suite D, Walnut,
CA 91789
TEL: 1 909 598 2488
FAX: 1 909 598 3188
EMAIL: info@aplusfine.com

■ Europe

● Germany

FineTek GmbH - Germany Office
Bei den Kämpen 26
21220 Seevetal Ramelsloh, Germany
TEL: +49 (0)4185 8083 12
FAX: +49 (0)4185 8083 80
EMAIL: info@fine tek.de

● Mütec Instruments GmbH - Germany Office

Bei den Kämpen 26
21220 Seevetal Ramelsloh, Germany
TEL: +49 (0)4185 8083 0
FAX: +49 (0)4185 8083 80
EMAIL: muetec@muetec.de



ООО "РусАвтоматизация"

454010 г. Челябинск, ул. Гагарина 5, оф. 507
тел. 8-800-775-09-57 (звонок бесплатный),
тел.: (351)799-54-26, тел./факс (351)211-64-57
info@rusautomation.ru; www.rusautomation.ru
русавтоматизация.рф