

DIN W72×H36mm Of Counter/Timer With Indication Only

■ Features

- Counting speed: 1cps/30cps/2kcps/5kcps
- Selectable voltage input (PNP) method or no-voltage input (NPN) method
- Input mode: Up, Down, Up/Down
- Dot for Decimal Point / Hour. Min. Second by RESET key
- Wide range of input power supply
: 100-240VAC 50/60Hz,
24VAC 50/60Hz, 24-48VDC universal
- Selectable Counter or Timer function by internal DIP switch
- Changed case color (ivory → black)
- [Counter]
20 input modes
- [Timer]
Various time setting range-6-digit model: 0.01 sec to 99999.9 hour /
4-digit model: 0.01 sec to 9999 hour
- Output: Indicator




! Please read "Safety Considerations" in operation manual before using.



■ Model

| Model | Display digit | Size | Output | Power supply |
|---------|------------------|---------------|-----------|-------------------------|
| FX4Y-I2 | 9999 (4-digit) | DIN W72×H36mm | Indicator | 24VAC 50/60Hz, 24-48VDC |
| FX4Y-I4 | | | | 100-240VAC 50/60Hz |
| FX6Y-I2 | 999999 (6-digit) | | | 24VAC 50/60Hz, 24-48VDC |
| FX6Y-I4 | | | | 100-240VAC 50/60Hz |

■ Specifications

| Model | Indicator | FX4Y-I2 | FX4Y-I4 | FX6Y-I2 | FX6Y-I4 |
|--------------------------------|---------------|--|---------------------------------|---|---------------------------------|
| Display digit | | 4-digit | | 6-digit | |
| Character size (W×H) | | 8×14mm | | 4×8mm | |
| Power supply | | 24VAC~ 50/60Hz, 24-48VDC== | 100-240VAC~ 50/60Hz | 24VAC~ 50/60Hz, 24-48VDC== | 100-240VAC~ 50/60Hz |
| Permissible voltage range | | 90 to 110% of rated voltage | | | |
| Power consumption | | Max. 2.8VA (24VAC~ 50/60Hz), Max. 1.8W (24-48VDC==) | Max. 3.8VA (240VAC~ 50/60Hz) | Max. 2.8VA (24VAC~ 50/60Hz), Max. 1.8W (24-48VDC==) | Max. 3.8VA (240VAC~ 50/60Hz) |
| Max. counting speed of CP1/CP2 | | Selectable 1cps/30cps/2kcps/5kcps (DIP switch) | | | |
| Return time | | Max. 500ms | | | |
| Min. signal width | | INHIBIT, RESET: approx. 20ms | | | |
| Input method | | Selectable voltage input (PNP) method or no-voltage input (NPN) method [Voltage input (PNP) method]-input impedance: max. 10.8kΩ, [H]: 5-30VDC==, [L]:0-2VDC [No-voltage input (NPN) method]-short-circuit impedance: max. 470kΩ, short-circuit residual voltage: max. 1VDC, open-circuit impedance: min. 100kΩ | | | |
| Repeat/Set/Voltage/Temp. error | | Max. ±0.01% ±0.05 sec | | | |
| Insulation resistance | | Over 100MΩ (at 500VDC megger) | | | |
| External power supply | | Max. 12VDC== ±10% 50mA | | | |
| Memory retention | | Approx. 10 years (non-volatile memory) | | | |
| Dielectric strength | | 2,000VAC 50/60Hz for 1 min (between all terminals and case) | | | |
| Noise immunity | AC voltage | ±2kV the square wave noise (pulse width 1μs) by noise simulator | | | |
| | AC/DC voltage | ±500V the square wave noise (pulse width 1μs) by noise simulator | | | |
| Vibration | Mechanical | 0.75mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 1 hour | | | |
| | Malfunction | 0.5mm amplitude at frequency 10 to 55Hz (for 1 min) in each X, Y, Z direction for 10 minutes | | | |
| Shock | Mechanical | 300m/s ² (approx. 30G) in each X, Y, Z direction for 3 times | | | |
| | Malfunction | 100m/s ² (approx. 10G) in each X, Y, Z direction for 3 times | | | |
| Environment | Ambient temp. | -10 to 55°C, storage: -25 to 65°C | | | |
| | Ambient humi. | 35 to 85%RH, storage: 35 to 85%RH | | | |
| Protection structure | | IP40 (front part, IEC standard) | | | |
| Approval | |  | | | |
| Weight ^{※1} | | Approx. 175g (approx. 120g) | | | |


※1: The weight includes packaging. The weight in parenthesis is for unit only.

※Environment resistance is rated at no freezing or condensation.


Up/Down Counter/Timer

Connections

• FX□Y-I4

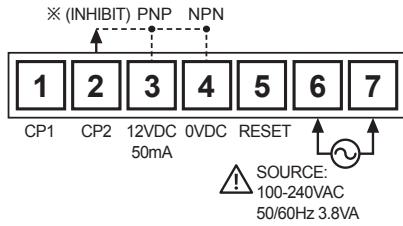



• FX□Y-I2

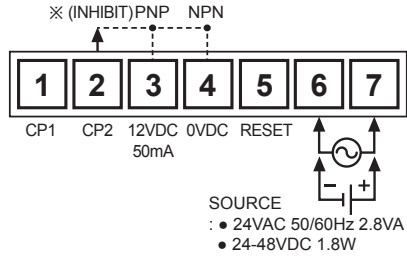



※INHIBIT: In case of timer mode, this terminal is for time hold.
(voltage input (PNP): connect with 12VDC, no-voltage input (NPN): connect with 0VDC)

Dimensions


(unit: mm)

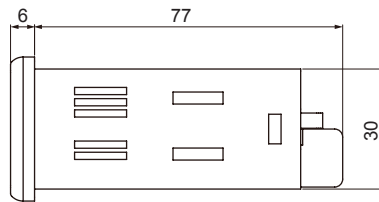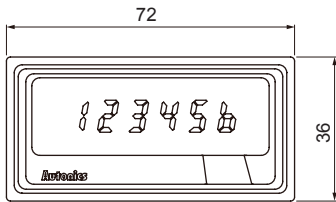

○ Bracket

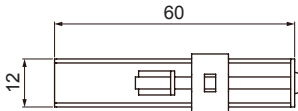

○ Panel cut-out

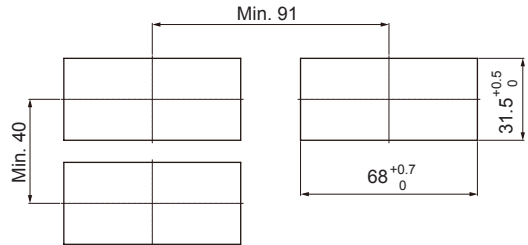


Counting Method

Be careful to select sensor because the counting method of NPN output type sensor is different from PNP output type sensor.


○ NPN output type Proximity sensor

: When the sensor is changed from OFF to ON, it counts.

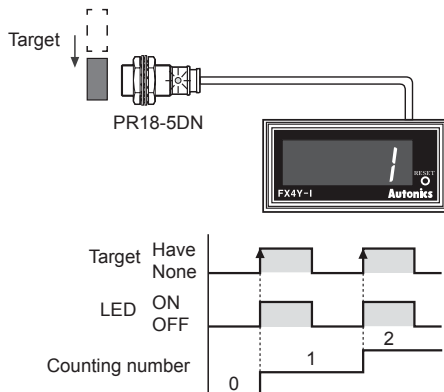

○ PNP output type Proximity sensor


: When the sensor is changed from ON to OFF, it counts.

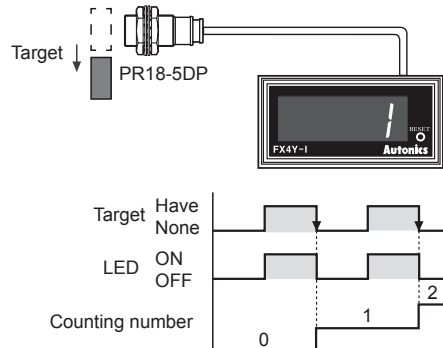

Input Connections


Voltage input (PNP)

Solid-state input (standard sensor: PNP output type sensor)

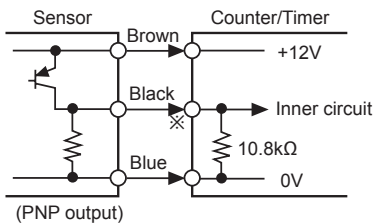


(PNP output)

※CP1, CP2 (INHIBIT), RESET input part

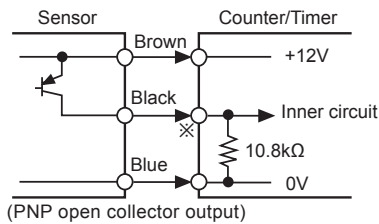

(PNP open collector output)


Contact input



※Counting speed
: Set as 1 or 30cps


No-voltage input (NPN)

Solid-state input (standard sensor: NPN output type sensor)

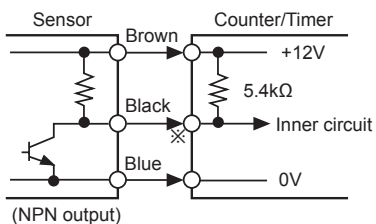


(NPN output)

※CP1, CP2 (INHIBIT), RESET input part

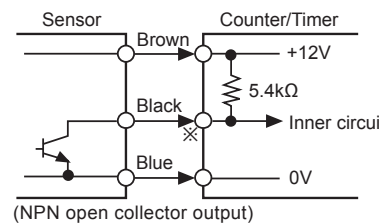

(NPN open collector output)

Contact input




※Counting speed
: Set as 1 or 30cps


Counting & Time Operation

Counting operation


Input mode: Up

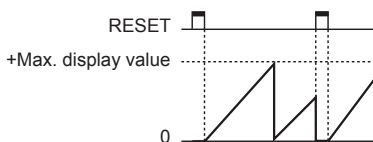


Input mode: Up/Down-A, B, C

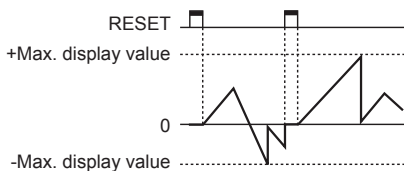

Input mode: Down

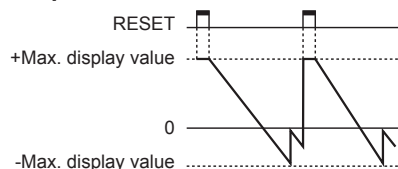


Input mode: Up/Down-D, E, F

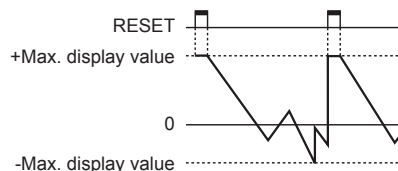


Time operation

Up mode

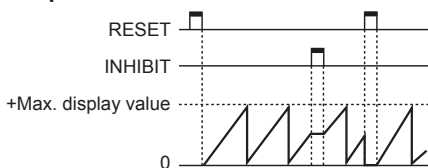


Down mode

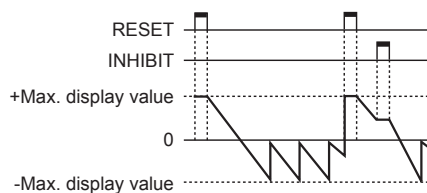

Up/Down Counter/Timer

■ DIP Switch Setting

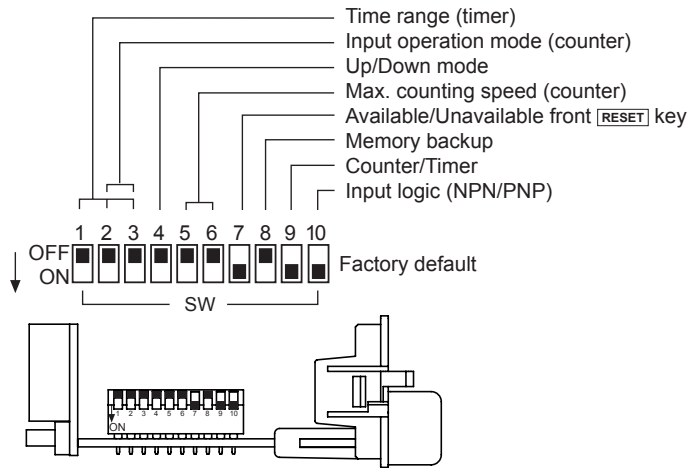

● Max. counting speed (counter)

| SW | Function |
|--|----------|
| OFF <input type="checkbox"/> 5 ON <input checked="" type="checkbox"/> 6 | 1cps |
| OFF <input type="checkbox"/> 5 ON <input checked="" type="checkbox"/> 6 | 30cps |
| OFF <input type="checkbox"/> 5 ON <input checked="" type="checkbox"/> 6 | 2kcps |
| OFF <input type="checkbox"/> 5 ON <input checked="" type="checkbox"/> 6 | 5kcps |

● Up/Down mode

| SW | Function |
|--|-----------|
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Up mode |
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Down mode |

● Available/Unavailable front **RESET** key

| SW | Function |
|--|--------------------------------|
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Unavailable front RESET key |
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Available front RESET key |

● Memory backup

| SW | Function |
|--|------------------|
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Memory backup |
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | No memory backup |

● Counter/Timer

| SW | Function |
|--|--------------|
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Timer mode |
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | Counter mode |

● Input logic

(CP1, CP2, INHIBIT, RESET input)

| SW | Function |
|--|---------------------------|
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | PNP (voltage input) |
| OFF <input type="checkbox"/> ON <input checked="" type="checkbox"/> | NPN (no-voltage input) |

■ Time Range (Timer)

| SW | 4-digit | 6-digit | SW | 4-digit | 6-digit |
|--|----------------|-------------------|--|-----------------|--------------------------|
| OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 99.99sec | 99999.9sec | OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 999.9min | 99999.9min |
| OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 999.9sec | 999999sec | OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 99hour 59min | 99hour 59min 59sec |
| OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 9999sec | 99min 59.99sec | OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 999.9hour | 9999hour 59min |
| OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 99min 59sec | 999min 59.9sec | OFF <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 ON <input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 | 9999hour | 99999.9hour |

Input Operation Mode (Counter)

※CP: Clock Pulse


| Input mode | | SW | Voltage input (PNP) method | No-voltage input (PNP) method |
|--|------------------------------------|---|----------------------------|-------------------------------|
| Up mode OFF <input type="checkbox"/> 4 ON <input type="checkbox"/> | Up/Down-A (command input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Up/Down-B (individual input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Up/Down-C (phase difference input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Up (adding input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | | | | |
| Down mode OFF <input type="checkbox"/> 4 ON <input type="checkbox"/> | Up/Down-D (command input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Up/Down-E (individual input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Up/Down-F (phase difference input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | Down (subtracting input) | OFF <input type="checkbox"/> 2 3 ON <input type="checkbox"/> | | |
| | | | | |

※A: over min. signal width, B: over than 1/2 of min. signal width. If the signal is smaller than these width, it may cause counting error (± 1).

※n: +Max. display value (FX4Y-I: 9999, FX6Y-I: 999999)

Up/Down Counter/Timer

■ Dot for Decimal Point / Hour. Min. Second

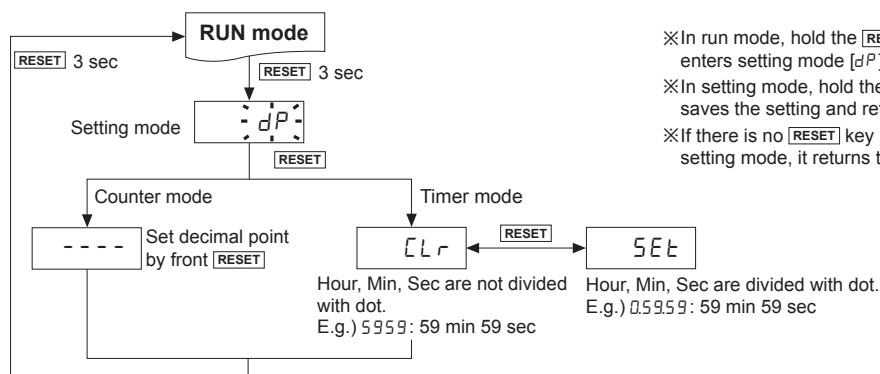

■ Proper Usage

- Follow instructions in 'Proper Usage'. Otherwise, It may cause unexpected accidents.
- 24-48VDC, 24VAC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Use the product, 0.1 sec after supplying power.
- When supplying or turning off the power, use a switch or etc. to avoid chattering.
- Install a power switch or circuit breaker in the easily accessible place for supplying or disconnecting the power.
- In case of contact input, set count speed to low speed mode (1cps or 30cps) to operate.
If set to high speed mode (2kcps or 5kcps), counting error occurs due to chattering.
- Keep away from high voltage lines or power lines to prevent inductive noise.
In case installing power line and input signal line closely, use line filter or varistor at power line and shielded wire at input signal line.
Do not use near the equipment which generates strong magnetic force or high frequency noise.
- This product may be used in the following environments.
 - ① Indoors (in the environment condition rated in 'Specifications')
 - ② Altitude max. 2,000m
 - ③ Pollution degree 2
 - ④ Installation category II

ООО "РусАвтоматизация"