

E-72 SERIES

DIGITAL INDICATING CONTROLLERS



DESCRIPTION

E-72 Series controllers are designed using new generation micro-controllers for on/off and PID control. Unit dimensions are 72x72 mm, conforming to IEC/TR 60668.

The E-72 Series has a 2x4 digits LED display range from -1999 to +9999 and configurable universal inputs (T/C, R/T, mV, mA) with 16 bit resolution, low calibration drifts with environmental conditions.

E-72 Series controllers have easy programming facilities to provide on/off and PID forms and are used in every field of the industry for measurement and control of temperature, pressure, level, current, voltage, resistance and other process parameters in the industries such as iron & steel, cement, plastic, chemistry, metallurgy, petrochemical plants, refineries, ceramic, glass and others.

TECHNICAL SPECIFICATIONS

Accuracy Class	0.5
Display Resolution	1/9999
Display	2x4 Digit LED (10 mm)
A/D Conversion	16 bit
D/A Conversion	12 bit
Reading Speed	2 readings / second
Input Resistance	T/C, mV $\geq 1 \text{ M}\Omega$ mA, $\leq 51 \Omega$
Noise Suppression	120 dB 50 Hz
Operating Temperature	-10 ... 55°C
Temperature Comp.	0 ... 50°C
Power Supply	85-265 V AC / 85-375 V DC 20-60 V AC / 20-85 V DC
Power Consumption	Max. 7 W
Relay Output	NA Contact 250 V AC 5 A
Input Signal	T/C, R/T, mA, mV
Sensors	Thermocouple Resistance thermometer Others= Standard and nonstandard transmitters and converters
Memory	EEPROM max. 10^5 writing
Protection Class	IP66 front panel (NEMA 4X) IP20 rear panel
Weight	232 gr

STANDARD WORKING LIMITS

Inputs	Type	Min.	Max.
Cu-Const	Type-U*	-200°C	600°C
Cu-Const	Type-T	-200°C	400°C
Fe-Const	Type-L*	-200°C	850°C
Fe-Const	Type-J	-200°C	1100°C
NiCr-Ni	Type-K	-200°C	1300°C
Cr-Const	Type-E	-200°C	1000°C
Nicrosil-Nisil	Type-N	-200°C	1200°C
Pt%10Rh-Pt	Type-S	0°C	1760°C
Pt%13Rh-Pt	Type-R	0°C	1760°C
Pt%18Rh-Pt	Type-B	60°C	1800°C
Pt-100	$\alpha=0.385$	-200°C	840°C
mV	0-1000 mV	-1999 unit	9999 unit
mA	0-20 mA/4-20 mA	-1999 unit	9999 unit

* DIN 43710 standards, others conform to IEC 60584-1.
E-72 Series instruments are general purpose and can be configured according to the application.



- This controller complies with the European Low Voltage Directive 2006/95/EC, by the application of safety standard TS EN 61010-1. (Pollution degree 2)
- This controller complies with the EMC Directive 2004/108/EC by the application of EMC standard TS EN 61326.

FEATURES

Set Adjustment	Between set point limits
Contact Forms	Low (LO), High (HI), Lob, Hlb, Lod, Hld
Dead Band (Hysteresis)	0-999.9 (EU)*
Resolution	0.1 or 1
Proportional Band (Pb)	0.1-999.9 (EU)*

Integral Time (It)	0-3600 seconds
Derivative Time (Dt)	0-3600 seconds
Bias	% 0-100
Control Form	On / Off, PID
Control Outputs	0-20 mA, 4-20 mA, NA Contact, SSR

* (EU) °C or °F for the thermocouples and resistance thermometer inputs, for the linear inputs, same with the unit which is controlled. Decimal point can be determined by parameter of dP.

ORDERING GUIDE

E-72 Series Controllers

E-72 -W- X - Y - Z

Standard Features

- Programmable universal inputs
 - Programmable universal outputs
 - Transmitter power supply 24 V DC
 - Auto-tune
- Configurable by the customer

Relay Outputs

None	0
1 relay 1 x (NO-0)	1
2 relay 2 x (NO-0)	2
Pulse Voltage to drive SSR, 24 V DC / 20 mA	3
Pulse Voltage to drive SSR, 24 V DC / 20 mA + 1 relay 1x (NO-0)	4

Analog Outputs

None	0
0-20 mA / 4-20 mA (non-isolated)	1
0-10 V DC	2

Communication

None	0
------------	---


Power Supply

85-265 V AC / 85-375 V DC	0
20-60 V AC / 20-85 V DC	1

Sample

E - 72 - 0 - 0 - 0 - 0	Indicator works with 220 V AC
E - 72 - 1 - 0 - 0 - 0	One relay output, works with 220 V AC
E - 72 - 2 - 1 - 0 - 1	Two relays and one analog output, works with 24 V DC

DIMENSIONS

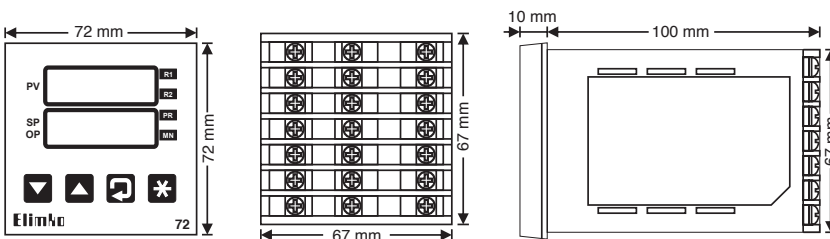

Panel cut-out = 68 x 68 mm

ООО "РусАвтоматизация"

454010 г. Челябинск, ул. Гагарина 5, оф. 507
 тел. 8-800-775-09-57 (звонок бесплатный), +7(351)799-54-26, тел./факс +7(351)211-64-57
info@rusautomation.ru; [русавтоматизация.рф](http://rusавтоматизация.рф); www.rusautomation.ru